

Test Report No. 7191016282-MEC11-OHH
dated 20 SEP 2011



PSB Singapore

Note: This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

SUBJECT:

Compression test of Drainage Cell.

Choose certainty.
Add value.

TESTED FOR:

Australian Drainage Modules Pty Ltd
Suite 10/2-4 Bells Avenue
Camberay NSW 2062
Australia

Attn : Mr. Gerard Jorna

TEST PROCEDURE:

1. The machine used : 2000 kN Schenck Trebel Universal Machine
2. Test specimen was positioned centrally between flat steel compression platens of 25 mm thickness.
3. Compressive load was applied on the specimen at a rate of 2.0 mm/min, until maximum load was observed. Tests was conducted on 3 empty cell.

SAMPLE DESCRIPTION:

3 pieces of drainage cell of nominal size 500(L) x 500(W) x 30(H) mm (see photo 1), were submitted by Australian Drainage Modules Pty Ltd on 07th Sep 2011, for testing.

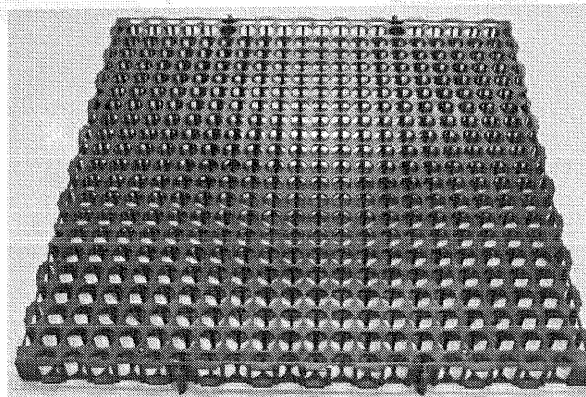


Photo. 1 : Sample as submitted



TÜV SÜD PSB

Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: testing@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
3 Science Park Drive, #04-01/05
The Franklin, Singapore 118223
TUV®



TEST RESULTS:

Sample Reference	Drainage Cell		
	Sample 1	Sample 2	Sample 3
Nominal size (mm)	500 x 500		
Nominal height (mm)	30		
Nominal area (m ²)	0.25		
Maximum load (kN)	201.5	199.5	205.9
Compressive strength (kPa)	806	798	823
Average compressive strength (kPa)	809		
Observation	Sample deformed at maximum compressive load		

Ms Kong Siew Yong
Associate Engineer

Oh Heng Hwa
Engineer
Polymer Products
Mechanical Centre